

DATE: 2024/3/25 (YY/MM/DD)

Customer : _____

APPROVAL SHEET

PRODUCT: AC ADAPTOR(RoHS Compliant)

MODEL: APS318-1215

PART NO.: STANDARD

V : A1


Receiver's stamp or signature

PLEASE APPROVE & RETURN BEFORE 2024/4/8

OR WE WOULD REGARD IT BEEN CONFIRMED.

RESPONSIBLE	APPROVED	ISSUED
		<i>nishuang</i>

ISSUES STAMP



Revised History

NO.	Revised Date	Description	Approved	Issued

info@qcledlight.com

<http://www.qcledlight.com>

No.511, 96 yangyong Road , TangXiaYong,SongGang,Bao'an District
Shenzhen Guangdong ,China 〒 518105

Anthin	DESCRIPTION	SWITCHING POWER AC ADAPTER	SHEET NO.	1 OF 4
			VER:	A1
	MODEL NO.	APS318-1215	PART NO.	STANDARD

1.INPUT REQUIREMENT

2.OUTPUT SPECIFICATION

3.MECHANICAL

4.RELIABILITY

5.ENVIRONMENT

6.OUTLOOKING

7.SAFETY

8.QC CHECK

9.DIMENSION

10.LABEL

11.PACKING

Anthin	DESCRIPTION	SWITCHING POWER	SHEET NO.	2 OF 4
			VER:	A1
	MODEL NO.	APS318-1215	PART NO.	STANDARD


1.INPUT REQUIREMENT

ITEM	SPECIFICATION	MIN	TYP.	MAX
NORMAL AC INPUT VOLTAGE	SINGLE PHASE	100Vac	110Vac/220Vac	240Vac
AC INPUT VOLTAGE RANGE	SINGLE PHASE	90Vac	110Vac/220Vac	264Vac
AC INPUT FREQUENCY	SINGLE PHASE	47Hz	50/60Hz	63Hz
AC INPUT CURRENT	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD.			350mA
AC INRUSH CURRENT	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD , 25°C.			30A
EFFICIENCY	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD	87%		

2.OUTPUT SPECIFICATION

ITEM	SPECIFICATION	MIN	TYP.	MAX
NORMAL DC OUTPUT VOLTAGE			12Vdc	
DC OUTPUT VOLTAGE RANGE	TYPICAL OUTPUT VOLTAGE $\pm 5\%$	11.4V		12.6V
LOAD CURRENT RANGE		0A		1.5A
PEAK LOAD CURRENT	TIME<60S			1.8A
RIPPLE	TYPICAL INPUT VOLTAGE , TYPICAL LOAD CURRENT , 25°C			120mV
HOLD-UP TIME	AT TYPICAL INPUT VOLTAGE AND FULL LOAD	10mS		
TURN-ON DELAY	TYPICAL INPUT VOLTAGE AND TUP LOAD CURRENT			2S
OVER CURRENT PROTECTION	AUTO RECOVERY		2A	2.3A
SHORT CIRCUIT PROTECTRON	THE ADAPTER SHALL NOT DAMAGE BY SHORT THE DC OUTPUT TO GROUND		0V	0.5V
OVER VOLTAGE PROTECTION			13.8V	16V

*TEST MEASURES

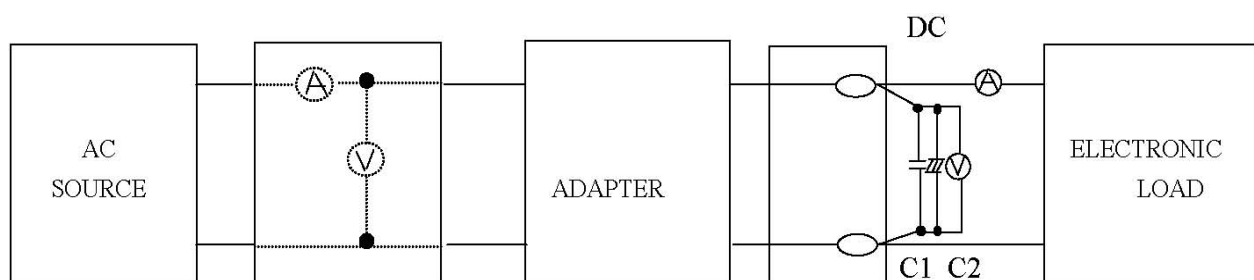

C1: 0.1uF CERAMICS CAPACITOR
C2: 10uF 50V ALUMINUM CAPACITOR

Anthin	DESCRIPTION	SWITCHING POWER AC ADAPTER	SHEET NO.	3 OF 4
			VER:	A1
	MODEL NO.	APS318-1215	PART NO.	STANDARD

3.MECHANICAL


ITEM	SPECIFICATION OR TEST CONDITION	ACCEPTANCE CRITERIA
BENDING TEST	NORMAL TEMPERATURE THE CORD SHALL WITHSTAND WEIGHT OF 200g, SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60 DEG. 1000CYCLE TIMES MIN. S/R SHALL WITHSTAND WEIGHT OF 1N. SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60DEG. 1000CYCLE TIMES MIN. BENDING SPEED 40CYCLE/MINUTE	NO SHORT CIRCUIT NO BREAKAGE OF THE CORD
VIBRATION	FREQUENCY RANGE:10~55Hz AMPLITUDE:1.5mm ACCELERATION: 1G SWEEP 1 MINUTE FOR X,Y,Z,AXIS EACH	THERE SHALL BENO ABNORMALITY ON THE APPEARANCE STRUCTURE AND OPERATING


4.RELIABILITY

ITEM	TEST CONDITION	ACCEPTANCE CRITERIA
TEMPERATURE UP WITH TYPICAL LOAD	TEST AT SURFACE OF THE CASE WITH TYPICAL AC INPUT AND TYPICAL LOAD IN OUTPUT 50/60Hz	TEMPERATURE UP UNDER 35 DEGREES
HI-POT TEST	INPUT TO OUTPUT 3000Vac 3 SECONDS 5mA	NO DAMAGE
MTBF	TYPICAL INPUT&FULL LOAD , 25°C	50000 HOURS
LIFE	TYPICAL INPUT&FULL LOAD, 40°C TYPICAL INPUT&FULL LOAD, 25°C	1YEARS ABOVE 2YEARS ABOVE
BURN-IN	AT 30°C(±10°C),NORMAL INPUT VOLTAGE	2~4 HOURS


5.ENVIRONMENT

ITEM	SPECIFICATION OR TEST CONDITION	min.	typ.	max.
OPERATING TEMPERATURE		0°C		40°C
STORAGE TEMPERATURE		-20°C		85°C
OPERATING HUMIDITY	NON-CONDENSING	5%RH		90%RH
STORAGE HUMIDITY	NON-CONDENSING	5%RH		90%RH

Anthin	DESCRIPTION	SWITCHING POWER	SHEET NO.	4 OF 4	
	MODEL NO.	APS318-1215	VER:	A1	
		PART NO.	STANDARD		
6.OUTLOOKING					
DIMENSION		:46(L)X33.2(W)X21.2(H)mm			
WEIGHT		:ABOUT 120g			
AC INPUT TYPE		:WALL MOUNT			
DC OUTPUT TYPE		: 5.5x2.1x10 "S" TYPE			
					
DC OUTPUT CABLE		:USE 2468 22AWG WIRE ROHS COMPLIANT			
INDICATION		:LABEL ROHS COMPLIANT			
CASE MATERIAL		:94V-0 ABS+PC ROHS COMPLIANT			
PCB MATERIAL		:94V-0 ROHS COMPLIANT			
7.SAFETY					
COMPLY SAFETY STANDARDS		STANDARD	FILE NO.		
PSE			JD50525871 CL-02		
<table border="1" style="width: 100%; height: 40px;"> <tr> <td style="text-align: center;">EMI</td> </tr> </table>					EMI
EMI					
8.QC CHECK					
ALL OF THE QUANTITY SHALL BE CHECKED BEFORE SHIPMENT,CHECK ITEM AS BELOW:					
(1)DC PLUG POLE CHECK					
(2)OCP FUNCTION CHECK					
(3)DC OUTPUT VOLTAGE CHECK					
(4)HIPOT&INSULATION CHECK					
(5)OUTLOOKING CHECK					

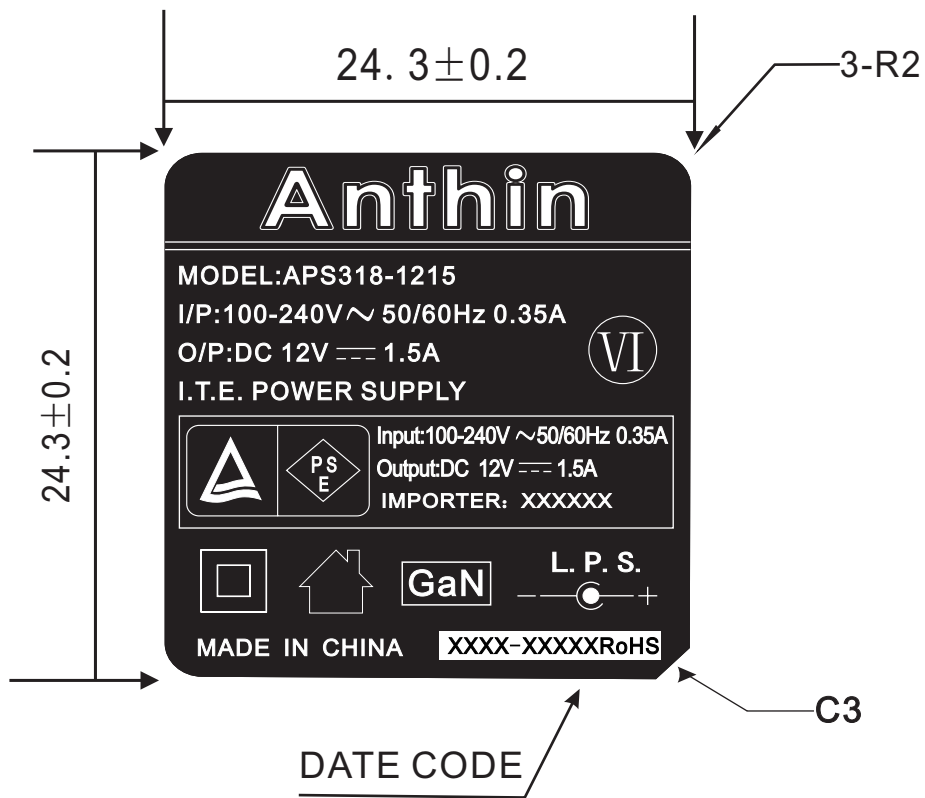

XXXX-XXXXRoHS

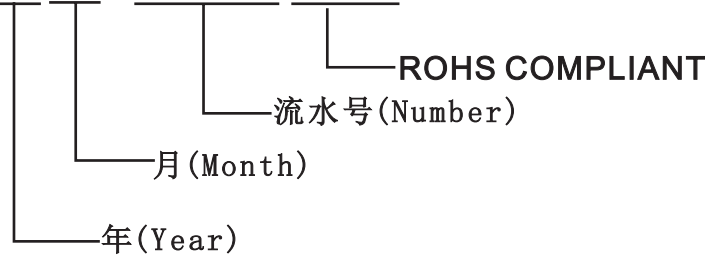


NOTE:

1. SILVER WORD ON BLACK BASE.
2. MATERIAL: PVC + MYLAR FILM.
3. RoHS COMPLIANT.

TOLERANCE					FINISH	NAME: LABEL	
L ≤ 4	0.05	0.08	0.1	0.2		MATERIAL	QTY
4 < L ≤ 20	0.08	0.1	0.2	0.3			
20 < L ≤ 50	0.1	0.15	0.3	0.4	REV.		A1
50 < L ≤ 200	0.15	0.25	0.4	0.6			
200 < L	0.2	0.4	0.5	0.8	SCALE	PART NO.	STANDARD
DEG.	CHKD.	APPD.	UNIT	mm			
Anni			REF.				
			REM.				

小白盒

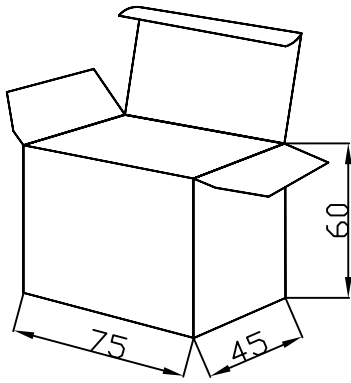

成品1PCS放入小白盒

小白盒材质：450g

小白盒外径尺寸：

L*W*H(75*45*60)

TOLERANCE: ±1

WHITE INNER BOX+OUT CARTON


WHITE INNER BOX OUT SIDE

DIMENSION:


L*W*H(75*45*60)

TOLERANCE: ±1

平卡

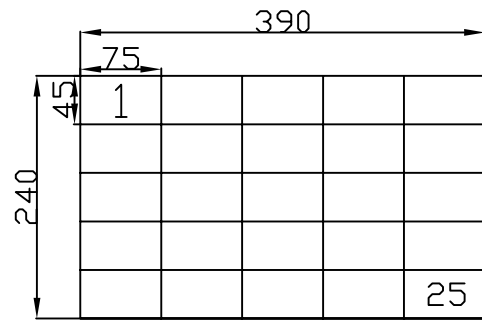

外箱

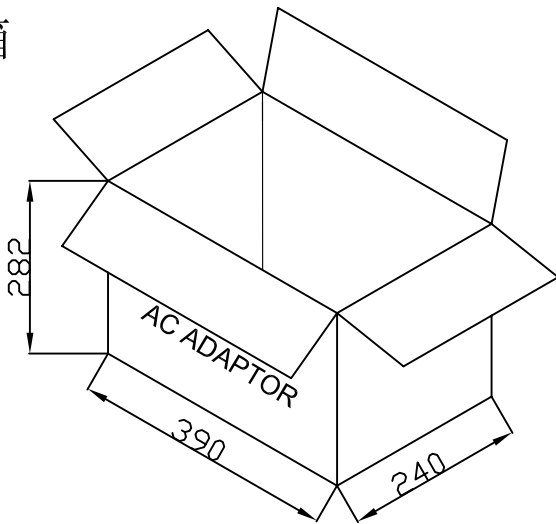

每层装25个小白盒，共可装4层。

成品100PCS装入外箱

外箱3段：K=A

外箱外径尺寸：L390*W240*H282

平卡尺寸：L380*W230

TOLERANCE: ±5

TOLERANCE					FINISH				NAME	12.PACKING
L < 4	±0.05	±0.08	±0.1	±0.2						
4 < L	±0.08	±0.1	±0.2	±0.3	MATERIAL	REV.	A1	PART NO.	STANDARD	
20 < L	±0.1	±0.15	±0.3	±0.4						
50 < L	±0.15	±0.25	±0.4	±0.6						
200 < L	±0.2	±0.4	±0.5	±0.8						
DEG.	CHKD.	APPD.		UNIT	mm					
anni			SCALE	REF.						
				DWG NO.						